



CRST23F

尺寸(Dimensions): 12.3X7.3X10.2mm

- 1,线圈功耗低 Low coil power consumption.
- 2,高灵敏度 High sensitivity.
- 3,体积小,重量轻 Small size,Light weight .
- 4,可直接焊接在印刷细路板中 PC board mounting.
- 5,可用于自动装置,通讯设备,无线电遥控,声控玩具 Suitable for automation facilities, telecommunication equipment, household electrical appliance, wireless radio remote control, sound control toys application etc

订货信息 Ordering information

CRST23F-S-DC12V-L

1 2 3 4

- 1,型号 Part number: CRST23F
- 2,封装形式:S:试水式;无:防尘式 Enclosure: S:Sealed type; Z:Dust cover
- 3,线圈额定电压 Coil Rated voltage(V):DC:03,05,06,09,12,24
- 4,线圈功耗 Coil power consumption:无 Nil 0.2W(标准 Standard);L:0.15W(高灵敏度 High sensitivity)

触点数据 Contact data

触点形式 Contact Arrangement	1C	
触点材料 Contact Material	AgNi, Ag	
触点负载(阻性) Contact Rating(Resistive)	2A/125VAC 2A/24VDC	
最大切换功率 Max.Switching Power	48W 250VA	
最大切换电压 Max.Switching Voltage	30VDC 125VAC 最大切换电流 Max.Switching Current:2A	
触点阻性或压降 Contact Resistance or Voltage Drop	≤50mΩ (0.1A 6VDC)	
寿命 Operation Life	电气 Electrical	10 ⁵
	机械 Mechanical	5*10 ⁶

线圈参数 Coil Parameter

线圈电压 Coil voltage(VDC)		线圈电阻 Coil Resistance Ω ±10%	吸合电压 VDC(最大) Pick up Voltage VDC(Max) (额定电压的 75%) (75% of rated voltage)	释放电压 VDC Release voltage VDC(Min) (额定电压的 10%) (10% of rated voltage)	线圈功耗 Coil power consumption (W)	动作时间 Operate Time (mS)	释放时间 Release Time (mS)
额定 Rated	最大 Max						
3	6	60.0	2.25	0.3	0.15	≤5	≤5
5	10	166.7	4.0	0.5			
9	18	540.0	7.2	0.9			
12	24	960.0	9.6	1.2			
3	6	45.0	2.25	0.3	0.20	≤5	≤5
5	7.5	125.0	4.0	0.5			
9	13.5	405.0	7.2	0.9			
12	18.0	720.0	9.6	1.2			
24	36.0	2880	19.2	2.4			

注意:1,使用的线圈电压低于线圈额定电压时将会损害继电器的工作.

2,吸合,释放电压仅供检测用,不是设计的使用指标.

Caution:1,The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.



2,Pick up and release voltage are for test purposes only and are not used as design criteria.

技术特性 Operation condition


绝缘电阻 Insulation Resistance		1000M Ω (500VDC)
介质耐压 Dielectric Strength	断开触点间 Between open Contacts	500VAC 1min
	触点与线圈间 Between Contacts and Coil	1000VAC 1min
耐冲击 Shock Resistance	动作极限 Functional	100m/s ²
	破坏极限 Destructive	1000m/s ²
抗振性 Vibration Resistance		10~55Hz 双振幅 Double amplitude 1.5mm
安装方式 Termination		PCB
环境温度 Ambient Temperature		-40~70℃
相当湿度 Relative Humidity		35%~95% RH
质(重)量 Unit weight		Approx.2.2g

外形尺寸 Dimensions(mm)

外形图

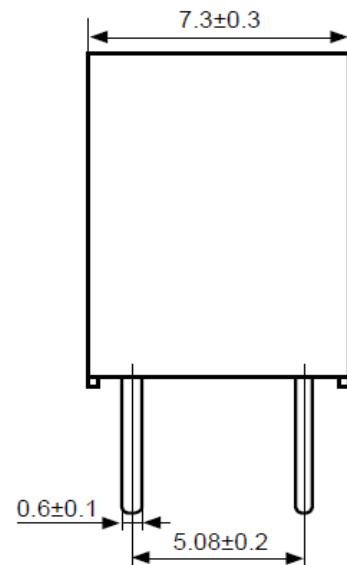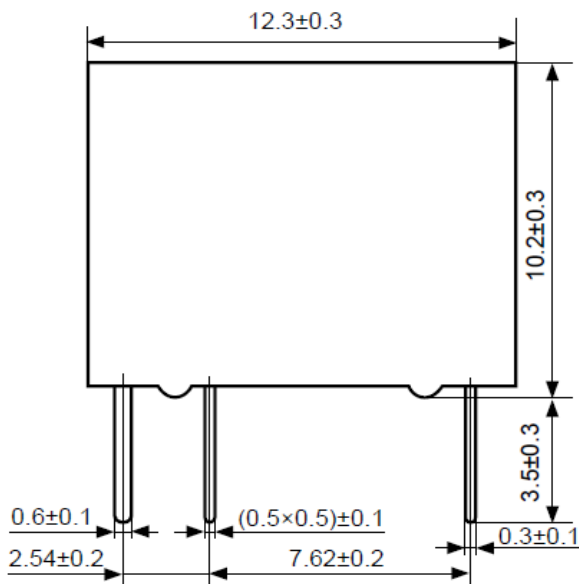

安装孔尺寸
(底视图)

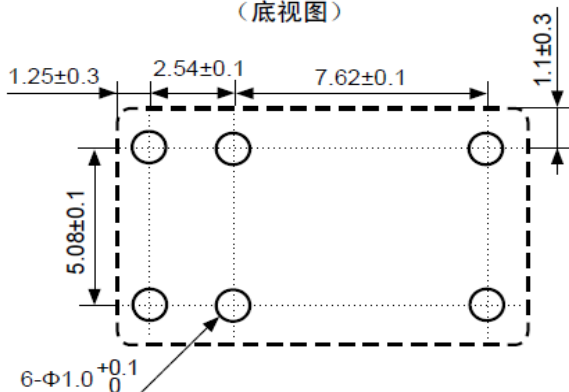

接线图
(底视图)

